


Antireflection Coatings

Curves & General Parameters

/* */

- Curves
- General Parameters

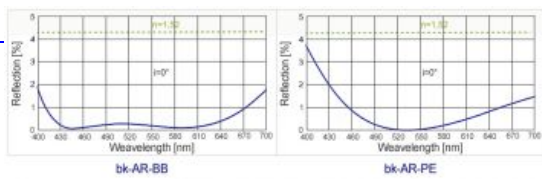

Substrat:

Float Glas

Abmessungen:

400 x 300mm

Abriebfestigkeit:

MIL-M-13508 C

Haftfestigkeit:

MIL-C-675 C

Stock program

ATTENTION! Other sizes and substrates (eg. plastics,...) are, due to our flexible stock program available at short notice mostly without an price increase.

Reflection [%]

Order No. \varnothing 25,4mm(B) CA > 22mm

Order No. 50x50mm(C) or \varnothing 50mm(D)

\geq 94% @ 550nm

bk-94-550-S-B

bk-94-550-S-C / D

\geq 97% @ 550nm

bk-97-550-S-B

bk-97-550-S-C / D

\geq 90% @ 300 - 400nm

bk-90-300-400-S-B

bk-90-300-400-S-C / D

\geq 94% @ 750 - 900nm

bk-90-750-900-S-B

bk-90-750-900-S-C / D