


# Front Face Mirrors

## Curves & General Parameters

/\* \*/

- Curves
- General Parameters

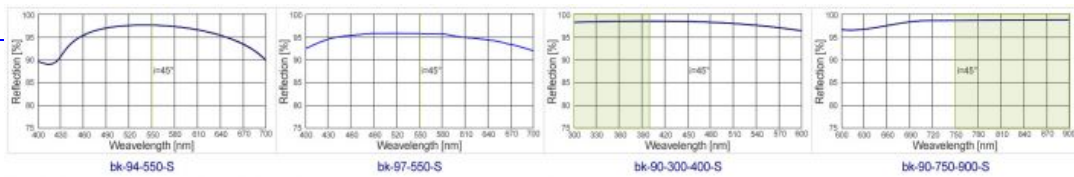

[zoom](#)

Substrat:	Float Glas
Dicke:	0,5 - 6mm
Abriebfestigkeit:	MIL-M-13508 C
Haftfestigkeit:	MIL-C-675 C
Temperaturbeständigkeit der Beschichtung:	bis 250° C

## Stock program

**ATTENTION!** Other sizes and substrates (eg. plastics,...) are, due to our flexible stock program available at short notice mostly without an price increase.

Reflection [%]	Order No. ø25,4mm(B) CA > 22mm	Order No. 50x50mm(C) or ø50mm(D)
≥94% @ 550nm	bk-94-550-S-B	bk-94-550-S-C / D
≥97% @ 550nm	bk-97-550-S-B	bk-97-550-S-C / D
≥90% @ 300 - 400nm	bk-90-300-400-S-B	bk-90-300-400-S-C / D
≥94% @ 750 - 900nm	bk-90-750-900-S-B	bk-90-750-900-S-C / D